

600x600MM
GLAZED VITRIFIED
TILES

3D SERIES



Ishan Ceramic zone, Wing-C, Office No.- 304,
8-A, N.H., Morbi-363642. (Gujarat) INDIA

+91-9426305152
+91-9033178653

export@rajglobal.net
marketing@rajglobal.net

www.rajglobal.net



NATURE WOOD LIVING THE BEAUTY

NATURE WOOD

LIVING THE BEAUTY

Raise the bar of insightful creativity

NATURE WOOD

Living The Beauty




Maintaining authenticity is a challenge indeed for many; especially when it involves replicating wooden floor designs. Wooden surfaces come with their own individual characteristics, a product of environmental conditions that induce unique patterns found in tree trunks. The uniqueness of such patterns pose a 'unique' challenge to us, which we have taken in our stride. Not only we ensure the quality and aesthetics of designs, but also the resultant feel as if one were walking upon a genuine wooden floor. With superb tile printing techniques, we have come up with unique designs, keeping in mind customer preferences and choices, as also to provide a heady mix of different sizes and design ranges to choose from. For those with a distinct taste for wooden flooring, our collections will surely invite a ponderous gaze that doesn't cease to stop.




NATURE WOOD

Living The Beauty

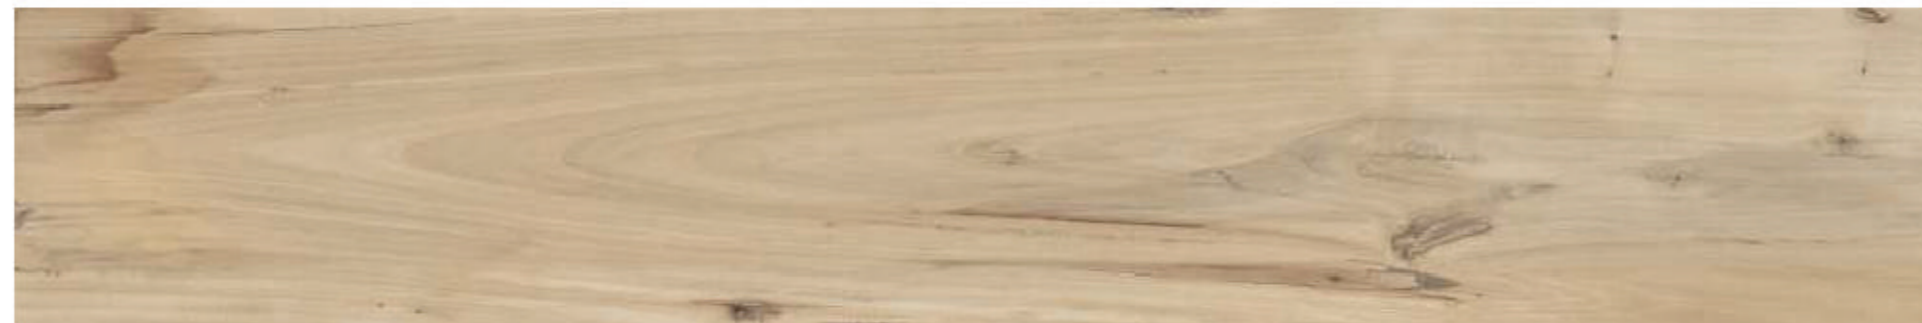

Atelier Pin

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Fishbone Hoary

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Fishbone Datmeal

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Fishbone Wan

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Groot Wood

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Holly Wood Beige

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Holly Wood Brown

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Jasper Coffee

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Lacquer Fawn

200x1000mm

200x1200mm



NATURE WOOD


Living The Beauty



Lacquer Natural

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Larch Miel


200x1000mm

200x1200mm



NATURE WOOD


Living The Beauty

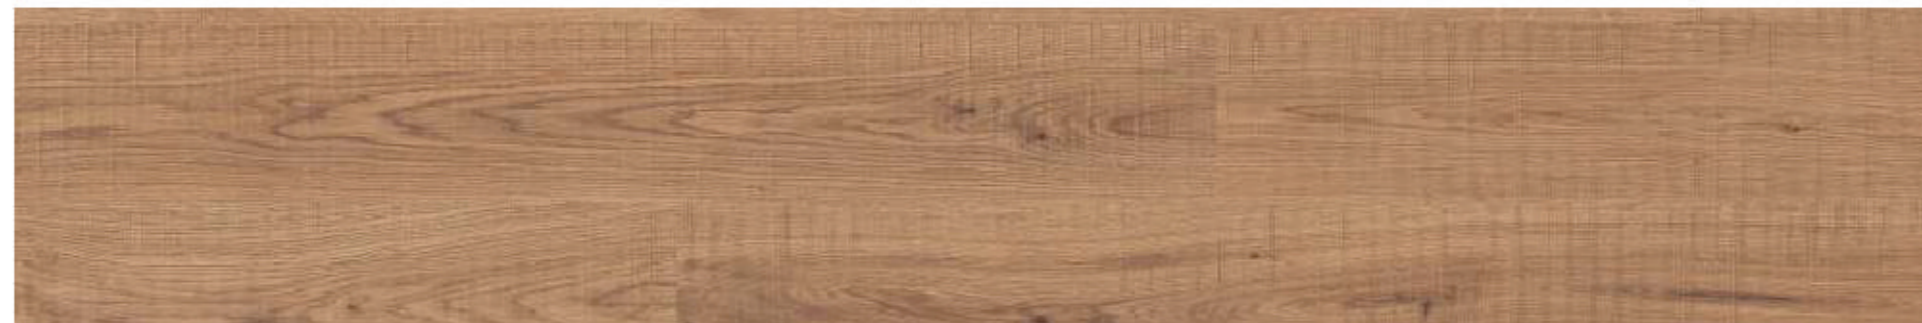

Essen Brown

200x1000mm

200x1200mm

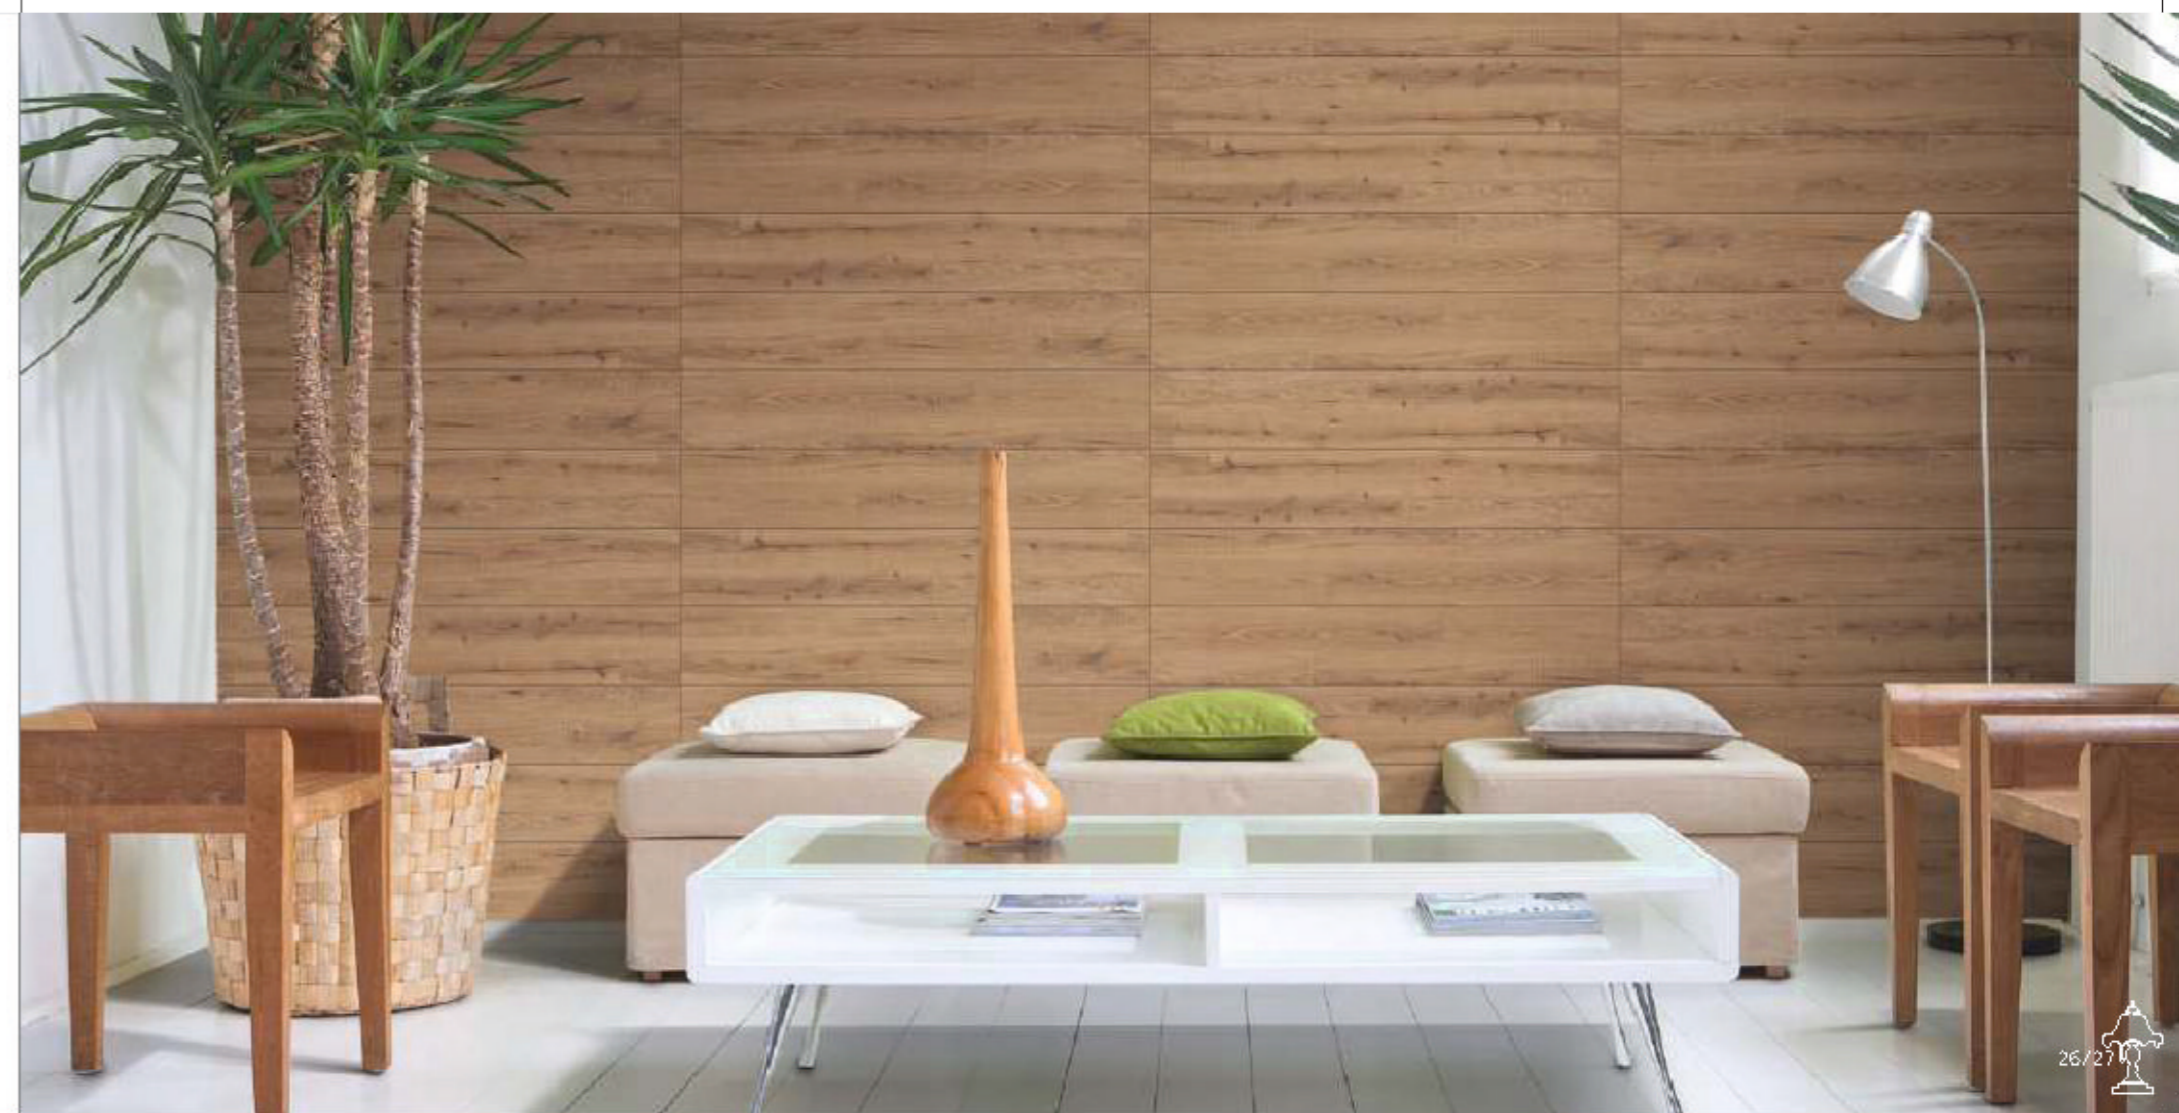

NATURE WOOD

Living The Beauty



Essen Crema


200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty

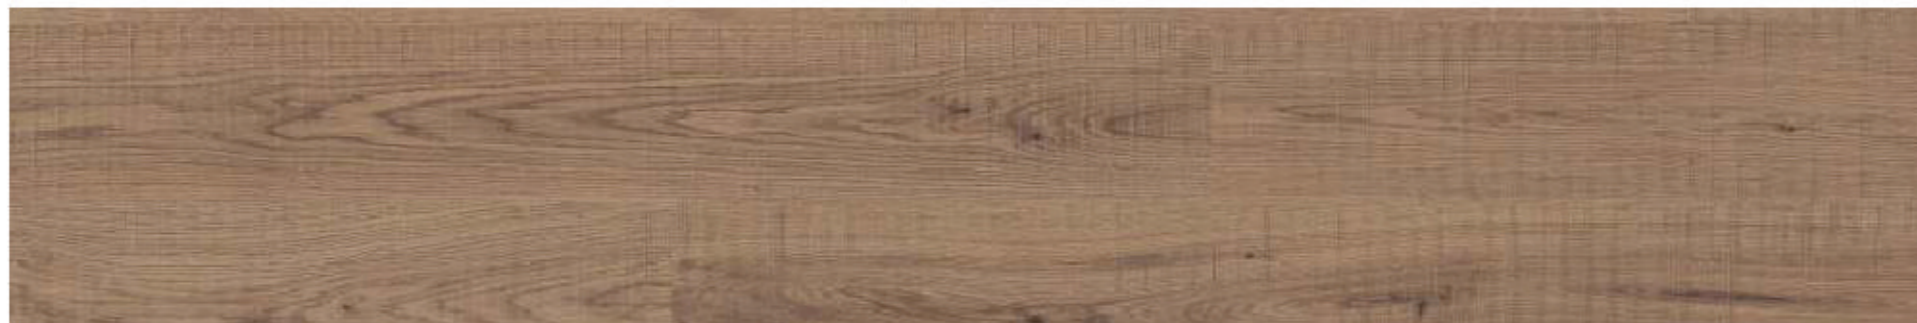

Essen Natural



200x1000mm




200x1200mm



NATURE WOOD

Living The Beauty

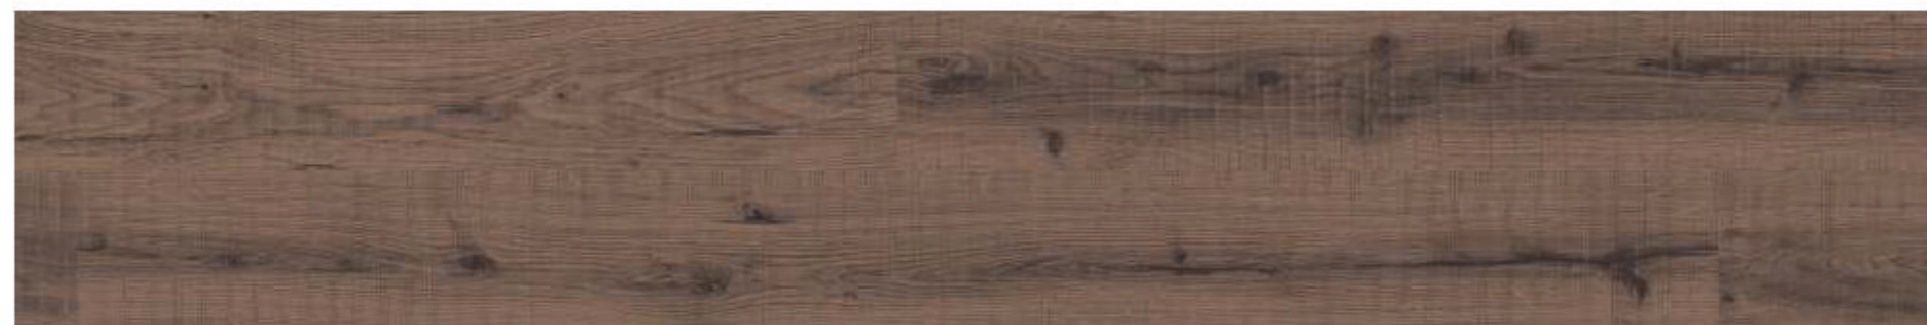

Essen Wenge


200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty

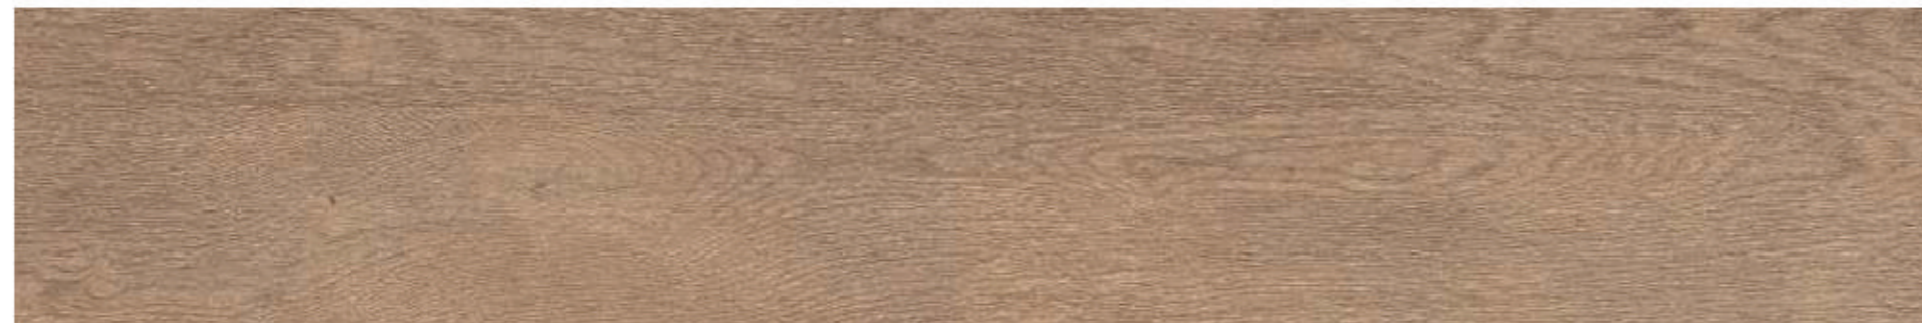

Hemlock Brown


200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty

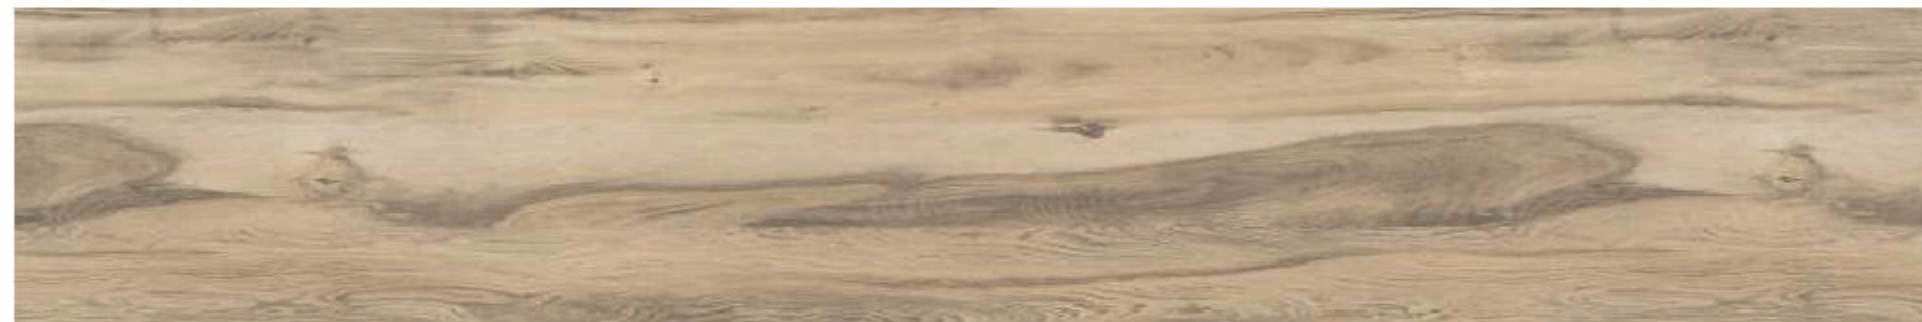

Robel Natural


200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty

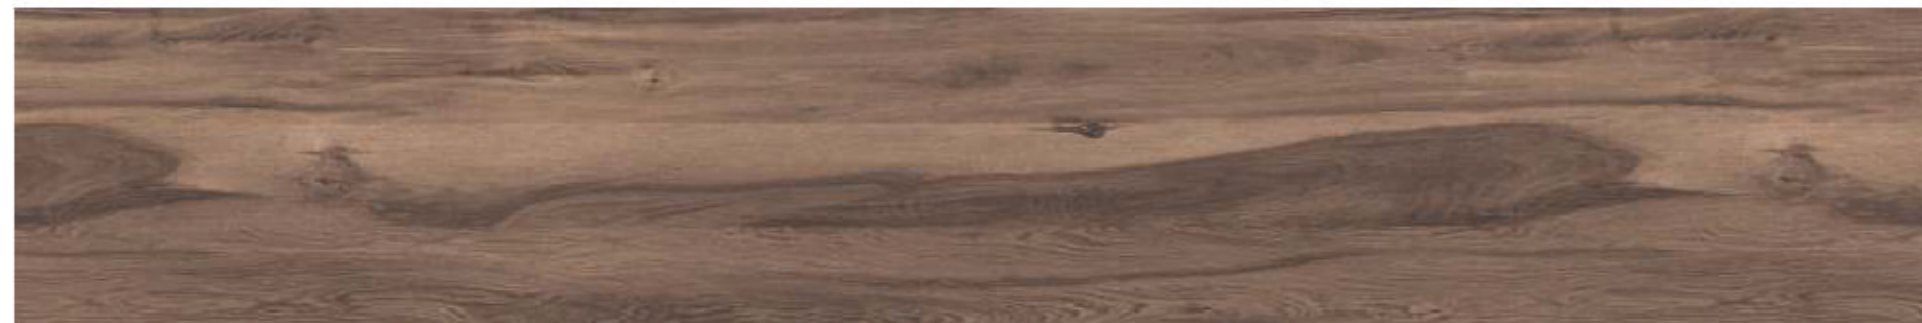

Robel Wenge

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Tasmanian Gold

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Tasmanian Oak

200x1000mm

200x1200mm



NATURE WOOD


Living The Beauty



Teak Beige

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Teak Brown

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Teak Rust

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Torkett Walnut

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Barkly Scarlet

200x1000mm




200x1200mm



NATURE WOOD

Living The Beauty

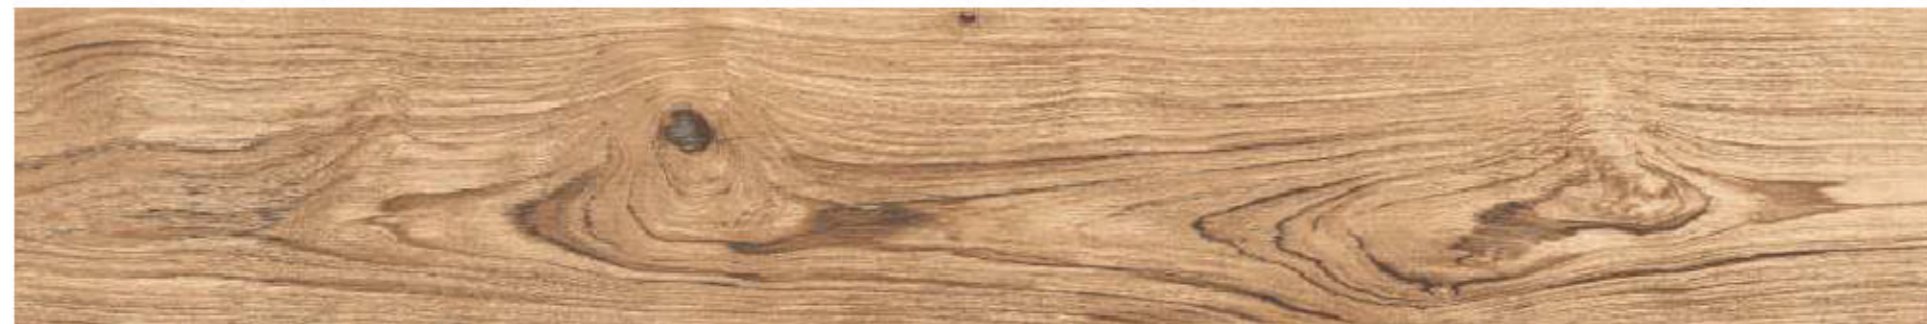

Barkly Soil

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Bredene Pin


200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty

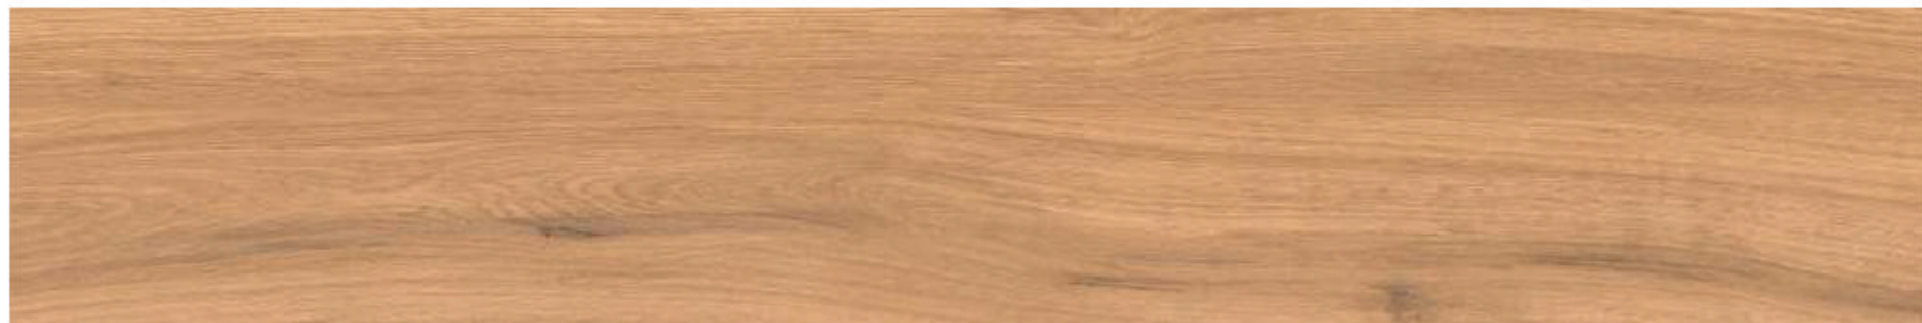


Epoca Carrot



200x1000mm



200x1200mm

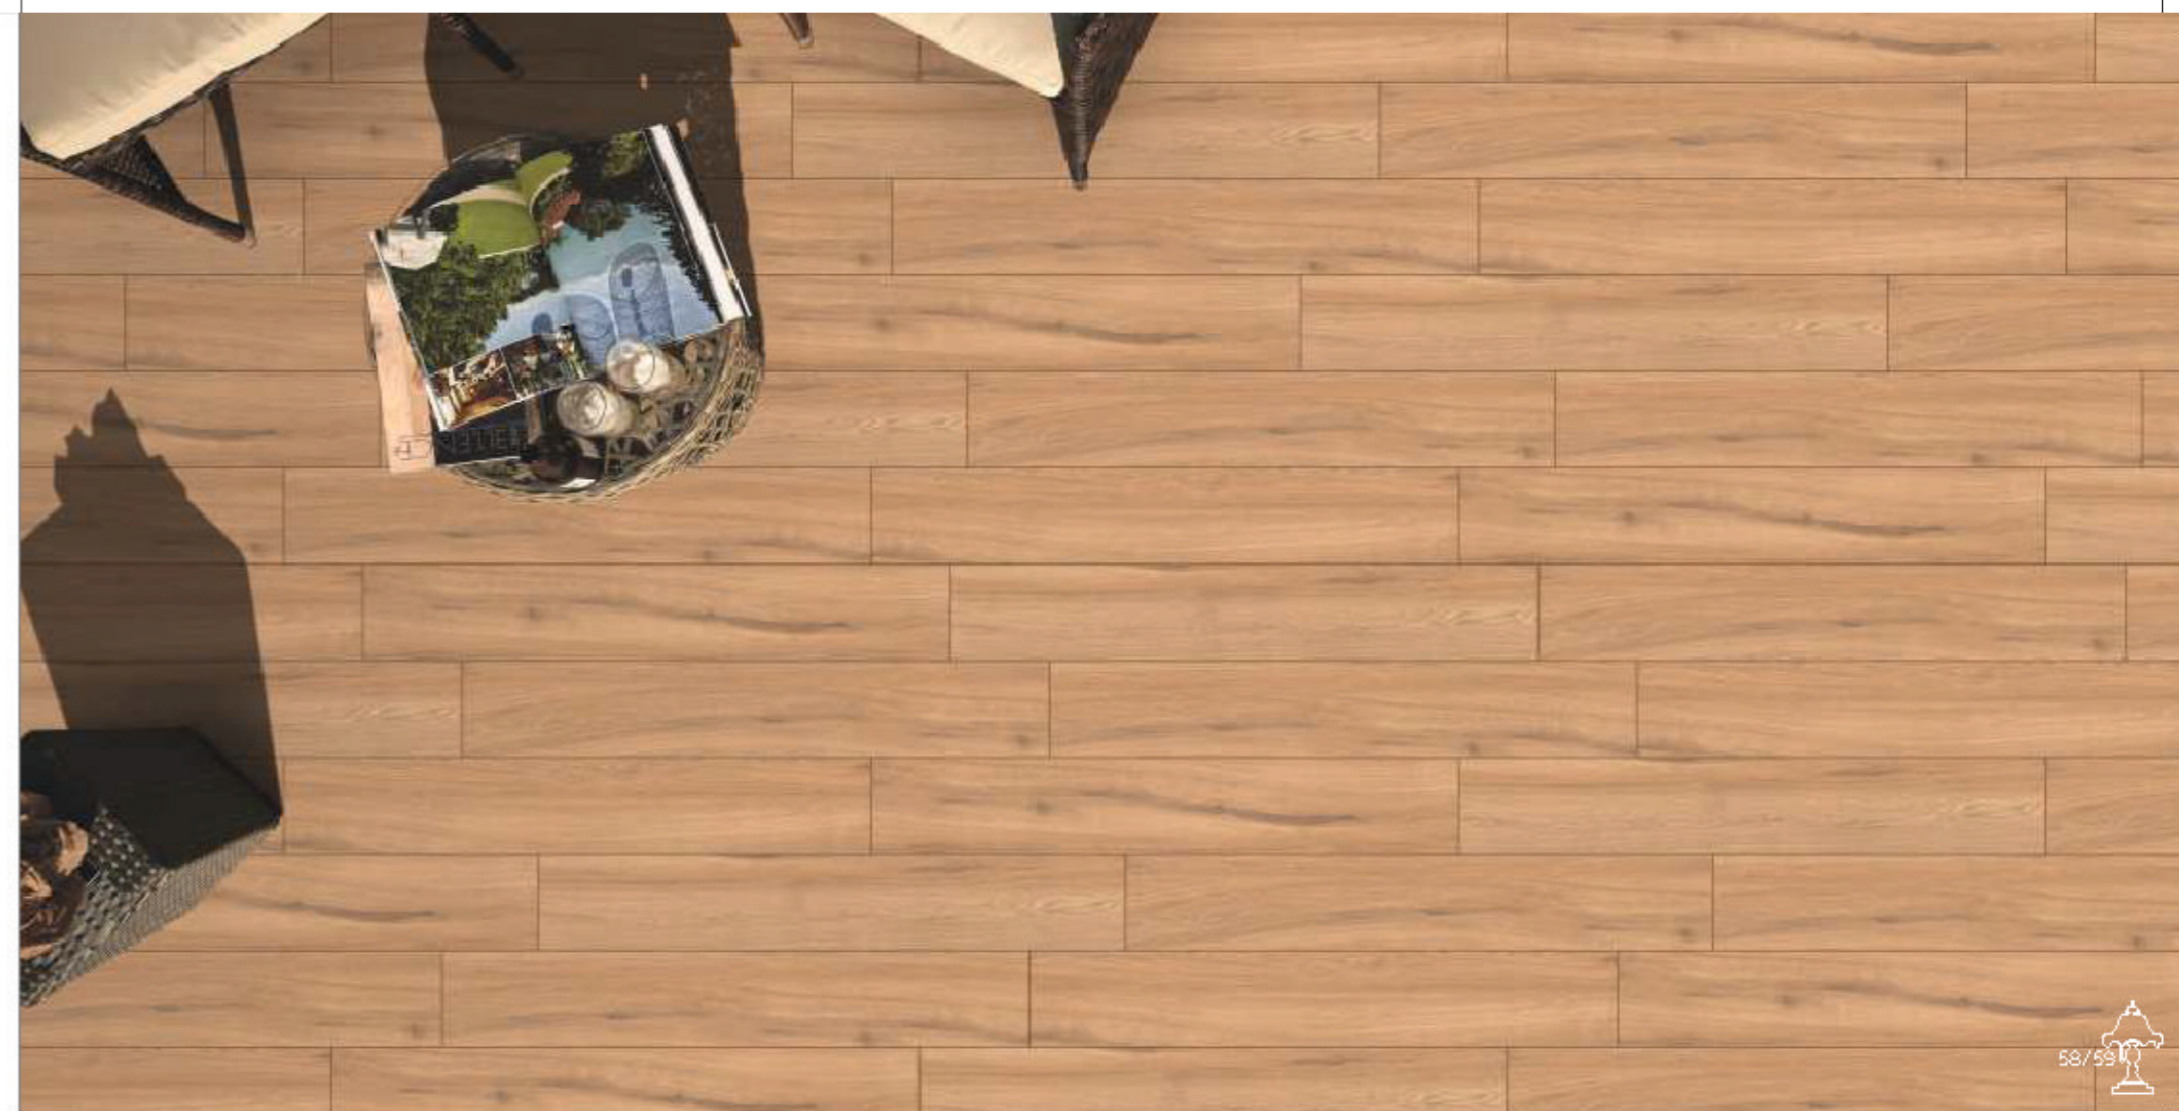

NATURE WOOD

Living The Beauty



Epoca Mist


200x1000mm

200x1200mm




NATURE WOOD

Living The Beauty

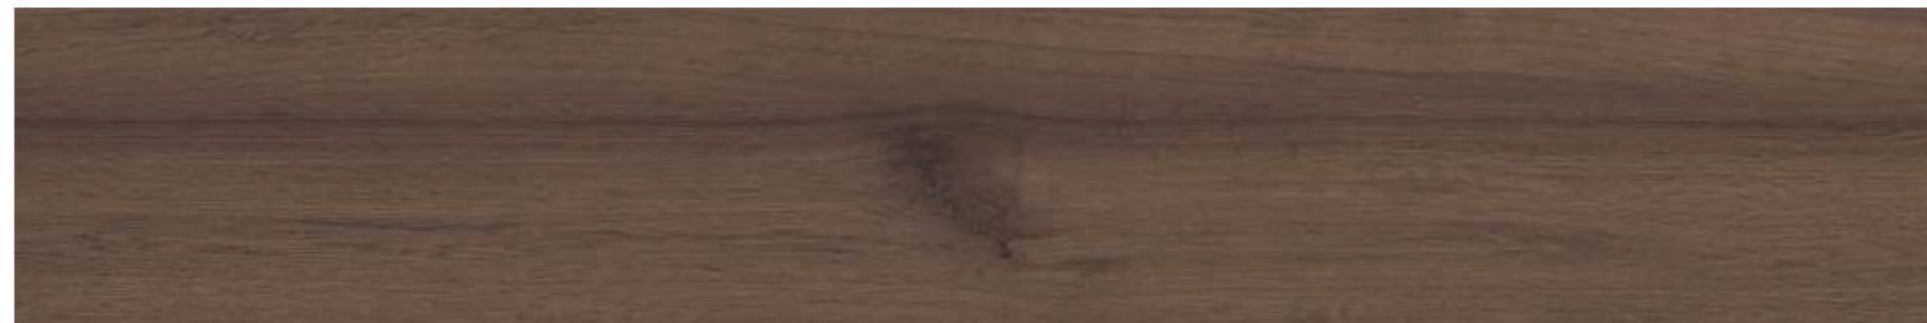

Epoca Umber

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Mackay Natural

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Ostand Caramel

200x1000mm

200x1200mm



NATURE WOOD

Living The Beauty



Ostand Carob

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Ostand Natural

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Ostand Pearl

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Ostand Pecan

200x1000mm




200x1200mm



NATURE WOOD

Living The Beauty

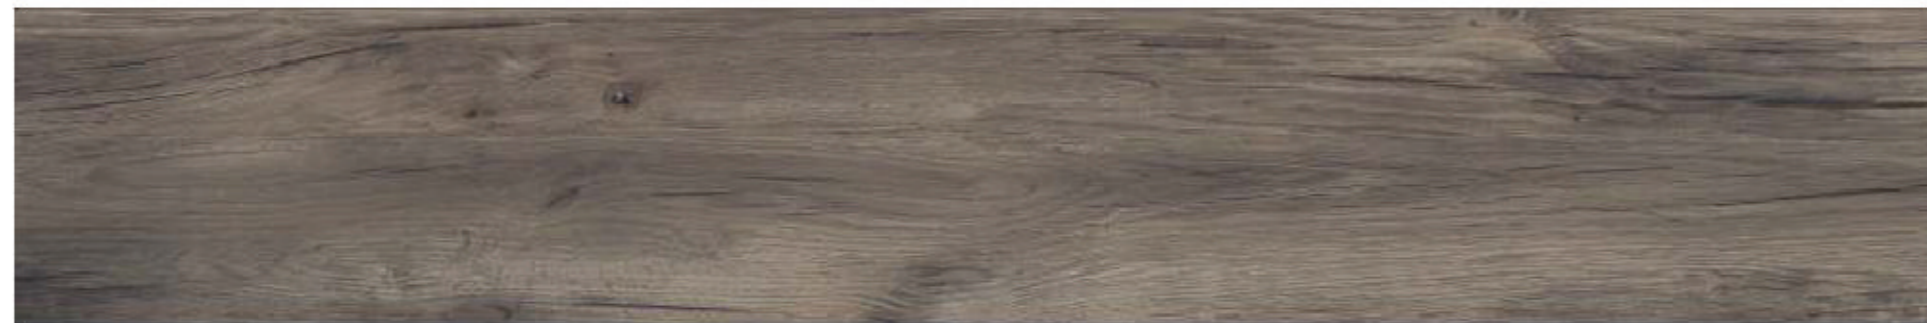

Plank Sward

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty



Shabby Brad

200x1000mm




200x1200mm



NATURE WOOD

Living The Beauty

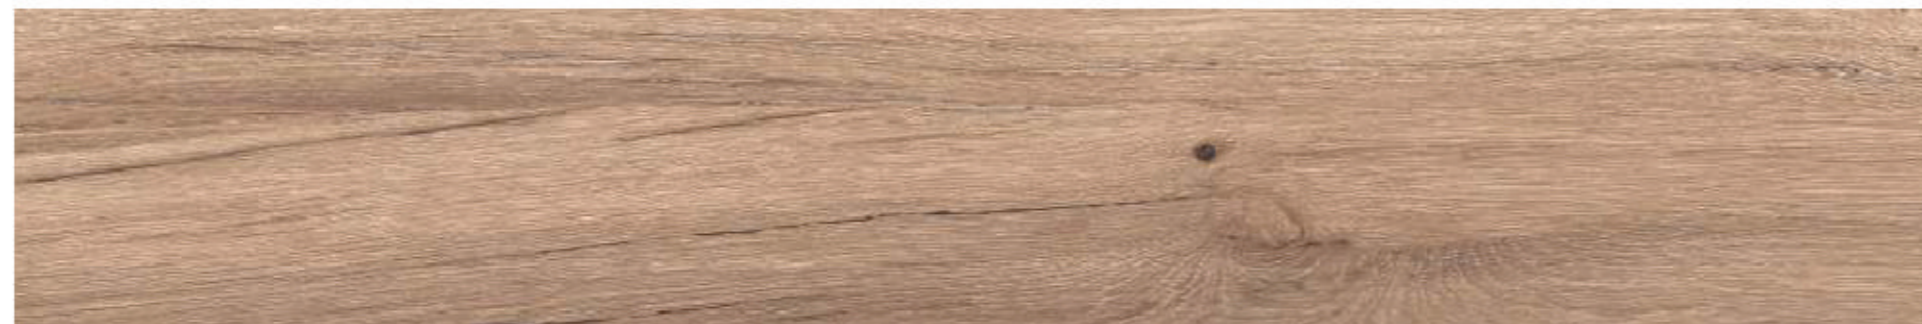

Shabby Decaf

200x1000mm



200x1200mm



NATURE WOOD

Living The Beauty

200x1000mm

200x1200mm



Aspen Natural



Beech Wood Brown



Décor Wood 1



Décor Wood 2



Dreem Honey Wood



Dreem Twis Wood




NATURE WOOD

Living The Beauty

200x1000mm

200x1200mm

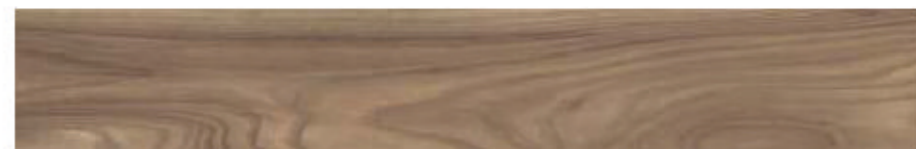

Dreem Wenge Wood



Hickory Wood Natural



Eden Brown Wood



Lava Natural Wood



Eden Crema Wood



Maso Tobacco Wood



NATURE WOOD

Living The Beauty

200x1000mm

200x1200mm



Mocha Wood Brown



Dak Wood



Mystic Dak Dark



Oskino Wenge Wood



Mystic Dak Light



Red Dak Wood



NATURE WOOD

Living The Beauty

200x1000mm

200x1200mm



Remix Sabbia Wood



Troy Brown Wood



Remix Terra Wood



Woodland Blusta



Tessa Coffee Wood



Woodland Matura



NATURE WOOD

Living The Beauty 145x600mm




Epoca Mist




Jasper Coffee



Epoca Umber

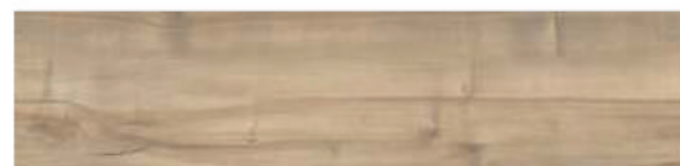

Lacquer Natural

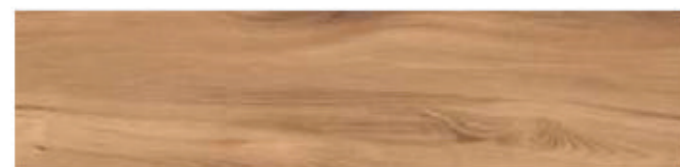

Troy Brown Wood



Dreem Honey Wood



NATURE WOOD


Living The Beauty 145x600mm



Plank Sward



Torkett Walnut

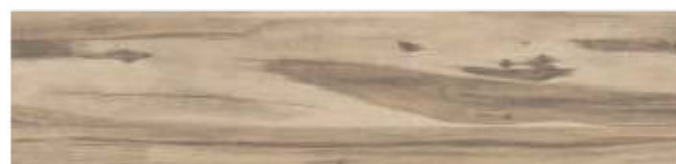

Robel Natural



Remix Terra Wood



Hickory Wood Natural



Wood Land Blusta



NATURE WOOD

Living The Beauty



TECHNICAL SPECIFICATION

Sr. No.	Icon	Property	International Std. ISO 10545/EN 178 Group	Tile Value	Method of Testing
1		Deviation in length	+/-0.3%	+/-0.3%	ISO 10545 Pt 2
2		Deviation in thickness	+/-0.5%	+/-0.5%	ISO 10545 Pt 2
3		Straightness of sides	+/-0.5%	+/-0.1%	ISO 10545 Pt 2
4		Rectangularity	+/-0.3%	+/-0.2%	ISO 10545 Pt 2
5		Surface flatness	+/-0.5%	+/-0.2%	ISO 10545 Pt 2
6		Water absorption	< 2-4%	< 2-4%	ISO 10545 Pt 3
7		Wedge hardness	>8	>6	EN 101
8		Flexural strength	>35N/mm ²	>40N/mm ²	ISO 10545 Pt 4
9		Abrasion resistance	<175 mm ³	<144 mm ³	ISO 10545 Pt 9
10		**Skid resistance (Friction coefficient)	>0.4	>0.4	ISO 10545 Pt 17
11		Breaking strength	1113 N	2000 N	ISO 10545 Pt 4
12		Frost resistance	Frost proof	Frost proof	ISO 10545 Pt 12
13		Chemical resistance	No Damage	No Damage	ISO 10545 Pt 13
14		Thermal shock resistance	No Damage	No Damage	ISO 10545 Pt 8
15		Colour resistance	No Damage	No Damage	DIN 51094
16		Stain resistance	Resistance	Resistance	ISO 10545-14
17		Moisture expansion	Nil	Nil	ISO 10545-10
18		**Glossiness	-	Min.80% reflection	Glossmeter
19		Resistance to Surface Abrasion (if tiles intended for use on floors)	Abrasion class shall be specified by the manufacturer	PEI Group V	ISO-10545-7 EN13000-11

PACKING DETAILS

Sr. No.	Size	No. of Tiles Per Box	Coverage Area in Sq. Feet
1	195x1200mm	6	15.5 sq. ft.
2	195x1000mm	6	12.90 sq. ft.

APPLICATIONS



DISCLAIMER: Sobo Wood Tiles reserves the right to delete & amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in this catalogue at anytime, the colours shown of tiles in this catalogue are purely illustrative and limited to printing process, please refer actual sample before final selection, the details of sizes, colours, references should be verified for typographical errors.

LAYING INSTRUCTIONS

TILES LAYING INSTRUCTIONS

- All the tiles must be checked prior to fixing for quality, batch no. and choice.
- Plaster the surface of the floor to be tiled and allow curing at least two weeks before tiling.
- While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in manufacturing tiles.
- For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
- For fixing tiles in floor using conventional method, we suggest the following laying instructions:
 A: Use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.
 B: Apply 20-25MM of bedding materials over the floor area of 1 Sq. Mtr. at a time.
 C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface. Do not use any heavy materials like iron or hammer to press tile.

- For fixing the tiles on Dado, we recommend the use of adhesive or equivalent materials.
- Allow 3-4 days of bed curing after laying tiles and later fill the joints with grout.
- We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
- Please note that company will not accept any liability in case of any problems arising out of non-adherence of above laying instructions.

NOTES:

- All technical specifications in this catalogue are for premium grade materials only.
- SHADE/SIZE VARIATION are inherent characteristics of ceramics. Certain products purposely have variations that are the part of designs and process. The same have been indicated.
- It is recommended to blend tiles by mixing tiles from various boxes and check for natural hue before fixing.
- Company's liability is also limited to the material supplied by the company; no other claim is entertained under any circumstances.
- No complaints shall be entertained regarding the decoration on tiles.

Helpful tips for better aesthetics look (Laying Instructions)

- For better aesthetic value and for long term guarantee use, it is strongly recommended to provide 3 mm spacer in between the tiles. Without spacer, harmony of the tiles might be disturbed.
- Make sure that the design, pattern and the arrow marked on the back side of tiles are in the same direction.
- Any product from digitile must be installed (laid) in the same format.

* THE COMPANY SHALL NOT BEAR ANY LIABILITY FOR THE PROBLEMS OUT OF NON-FULFILLMENT OF LAYING INSTRUCTIONS AS ABOVE.

Wooden Plank Tile: Demo & Installation

